




挡板号对照表 *Flange Application Sheet*

齿数 Teeth Number (Z)	同步轮齿型 TEETH PROFILE of Timing Pulleys										
	MXL	XL	L	H	3M	5M	8M	14M	T2.5	T5(AT5)	T10(AT10)
	乐为挡板规格代码 NOVO flanges code										
10		1	50		501					3	7
11		1	50							1	9
12		2	52		502	14			501	1	13
13		2	83						501	2	12
14		4	54	59	503	2			502	2	11
15		4	55	60	516	4			502	4	16
16	502	5	56	61	504	4			503	5	18
17		6	57	62					503	5	20
18	503	7	58	63	505	6			504	6	21
19		7	59	64					505	8	24
20	503	9	60	76	517	8			505	8	24
21		9	61	66	518	9			505	9	26
22	504	10	62	67	518	15	53		512	9	27
23		13	63	68					512	10	27
24	505	12	63	70	518	13	69		512	13	29
25		12	64	71					506	12	29
26		11	65	72	508	12	61		507	12	31
27		11	65	74					507	11	32
28	506	16	66	75	509	11	79	153	507	11	33
29		16		75				154	507	16	
30	506	18	68	78	509	16	73	154	508	16	35
32	507	20	70	80	510	18	76	160	509	18	38
33			71	81					509		
34		22	72	81		20	66	166	509	21	72
35		22	72	85	519				509	22	
36	508	23	74	85		21	68	168	510	23	43
37									510	23	
38		24		86		24	70	172	510	24	78
39		24			513						
40	509	26	78	90		25	77	162	511	24	47
41		26									
42	509	27	80	94					511	26	
43		27			520						
44	510	27	81	95		27	75	175	513	27	
45			81	96						27	85
46										29	
48		29	85	100		29	78	180	513	29	86
50									514	31	
56		35				33	85	182			
60		38							515	38	100
64						48	90	184			
72						43	97				

挡板号对照表 Flange Application Sheet



NOVO flange for Timing Pulley

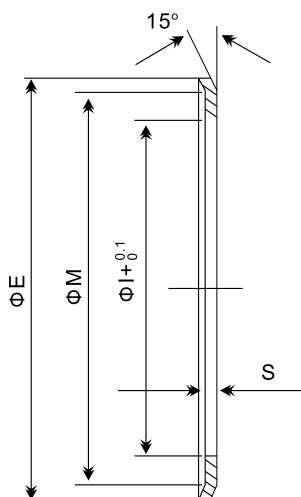

技术要求SPECIFICATION:

1. Material: Q235 cold-rolled steel or LY12-T4 Aluminium;
(材料: 冷转钢Q235或铝LY12-T4)
2. Must be fine and plain, not warped.
成型必须平整美观, 无翘踊
3. Remove sharp edge and debur.
锐边倒钝, 去除毛刺
4. No defect on surface, free of dent, scratch and rust, etc.
表面不得有压痕, 锈, 碰划伤

S=0.5 mm

规格代码 Part Code	E	I	M
501	13.0	6.0	10.0
502	15.0	8.0	12.0
503	16.0	9.5	13.0
504	17.5	11.6	14.5
505	20.0	12.2	16.5
506	25.0	14.5	21.5
507	26.0	17.8	24.0
508	28.0	20.0	25.0
509	32.0	23.0	27.5
510	36.0	25.0	31.0
511	38.0	26.5	34.0
512	22.0	14.5	19.0
513	42.0	30.5	38.0
514	44.0	32.5	40.5
515	51.0	40.0	47.0
516	17.5	10.5	14.5
517	23.0	14.0	20.0
518	25.0	15.0	21.5
519	39.0	28.0	34.5
520	48.0	37.0	43.5

S=1.0 mm

规格代码 Part Code	E	I	M
1	23.0	12.5	18.0
2	25.0	15.0	21.5
3	19.5	12.0	17.5
4	28.0	17.8	24.0
5	32.0	20.0	26.0
6	32.0	23.0	27.5
7	35.0	23.0	30.5
8	36.0	25.0	31.0
9	38.0	26.5	34.0
10	41.0	30.0	36.0
11	48.0	37.0	43.5
12	44.0	32.5	40.5
13	42.0	30.5	38.0
14	23.0	14.0	20.0
15	39.0	28.0	34.5
16	51.0	40.0	47.0
17	-	-	-
18	54.0	43.0	50.5
19	-	-	-
20	57.0	47.0	51.5
21	60.0	47.0	57.0
22	61.0	49.0	56.5
23	64.0	47.0	57.0
24	66.5	52.0	63.0
25	71.0	56.0	64.0
26	70.0	53.0	66.5

S=1.5 mm

规格代码 Part Code	E	I	M
50	37.0	25.0	33.0
51	39.0	28.0	34.5
52	43.0	31.0	39.0
53	60.0	47.0	57.0
54	48.0	37.0	42.0
55	51.0	38.5	45.0
56	54.0	43.0	48.0
57	57.0	46.0	51.0
58	60.0	48.0	54.2
59	64.0	47.0	57.0
60	66.5	53.0	60.2
61	70.0	53.0	64.0
62	75.0	57.0	68.0
63	79.0	60.0	72.5
64	82.5	64.0	76.0
65	86.0	68.0	81.5
66	91.0	73.0	86.0
67	94.0	76.0	88.0
68	97.0	79.0	92.0
69	66.0	52.0	61.5
70	102.0	82.5	97.0
71	106.0	86.0	100.0
72	112.0	91.0	105.5
73	83.0	68.0	76.5
74	115.0	94.0	109.0
75	120.0	99.5	112.5

S=2.5 mm

规格代码 Part Code	E	I	M
150	-	-	-
151	-	-	-
152	-	-	-
153	128.0	107.0	124.0
154	138.0	112.0	131.0
155	140.0	107.0	125.0
156	146.0	107.0	133.0
157	155.0	107.0	139.0
158	160.0	120.0	153.0
159	170.0	120.0	162.0
160	154.0	122.0	142.0
161	-	-	-
162	188.0	150.0	176.0
163	198.0	150.0	180.0
164	205.0	160.0	189.0
165	212.0	162.0	200.0
166	160.0	130.0	150.0
167	227.0	176.0	210.0
168	168.0	135.0	162.0
169	240.0	192.0	224.0
170	256.0	220.0	240.0
171	160.0	136.0	150.0
172	183.0	145.0	170.0
173	267.0	220.0	240.0
174	188.0	160.0	177.0
175	211.0	173.0	198.0



挡板号对照表 *Flange Application Sheet*

S=1.0 mm

规格代码 Part Code	E	I	M
27	75.0	60.0	68.5
28	-	-	-
29	83.0	68.0	78.0
30	-	-	-
31	87.0	72.0	82.5
32	91.0	76.0	85.5
33	93.0	80.0	89.0
34	-	-	-
35	97.0	83.0	93.8
36	-	-	-
37	-	-	-
38	106.0	90.0	101.0
39	-	-	-
40	-	-	-
41	-	-	-
42	-	-	-
43	119.0	103.0	113.5
44	-	-	-
45	-	-	-
46	-	-	-
47	131.0	115.0	125.5
48	-	-	-
49	-	-	-

S=1.5 mm

规格代码 Part Code	E	I	M
76	87.0	72.0	82.5
77	106.0	90.0	101.0
78	128.0	107.0	121.0
79	75.0	60.0	70.5
80	135.0	115.0	128.5
81	142.0	120.0	137.0
82	82.5	67.0	76.0
83	44.0	32.5	40.5
84	-	-	-
85	150.0	130.0	145.0
86	158.0	138.5	153.0
87	-	-	-
88	-	-	-
89	-	-	-
90	168.0	148.0	161.0
91	-	-	-
92	-	-	-
93	-	-	-
94	180.0	154.0	174.0
95	184.0	162.0	177.0
96	192.0	165.0	181.5
97	192.0	173.0	187.0
98	-	-	-
99	-	-	-
100	200.0	180.0	193.0

S=2.5 mm

[illegible]